

FW6600 Portable Worklight



■ Applications

- Suitable for illumination of repair works of cables, distribution boxes, high poles, etc.


■ Features

- Multifunctional: it can be used as a flashlight, mobile worklight or fixed lighting.
Mobile lighting: it is designed to be held by hand or carried by shoulder, and carrying case can be ordered separately.
Fixed lighting: it can be fixed by magnetic adsorption, and hook can be ordered separately.
- Cover provides high light transmittance, soft light and uniform optical distributions free from glare.
- It is supplied with built-in lithium battery and charger.
Charging time of fast-charging mode is only 3 hours.
Powerbank is suitable for charging the worklight at rescue scenes or when there is not enough time for charging.
- Battery capacity indication and low capacity warning allow for safety of operation. Operator can check residual capacity directly and charge the battery when it falls low.
- Robust housing ensures excellent impact resistance. No damage is found after the test of falling from 1m above the ground.



■ Components

1. Broad beam button
2. Plug for charging port
3. Charging indicator
4. Narrow beam button
5. Cover
6. Magnetic ring
7. Light head
8. Hook

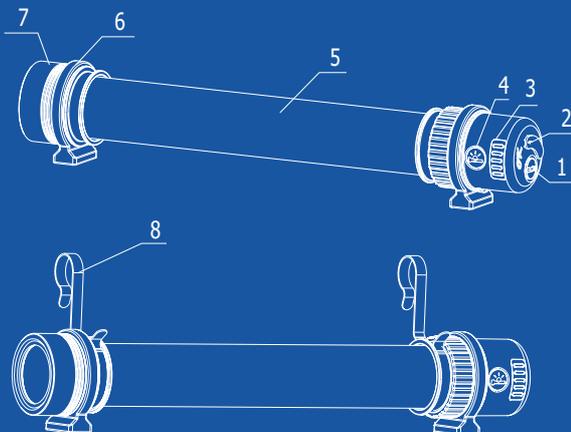

■ Technical data

Model: FW6600

1. Rated voltage: 7.4 V DC
2. Battery capacity: 5 Ah
3. Light source: LED
Rated power: 9 W (broad beam) / 3 W (narrow beam)
Life: > 100000 h
4. Duration: > 5.5 h (broad beam, working light)
 - > 3.5 h (broad beam, spotlight)
 - > 35 h (narrow beam, working light)
 - > 20 h (narrow beam, spotlight)
5. Center illuminance (2 m away from light source):
 - > 20 Lx (broad beam, working light)
 - > 30 Lx (broad beam, spotlight)
 - > 750 Lx (narrow beam, working light)
 - > 1500 Lx (narrow beam, spotlight)
6. Charging time: ≤ 3 h
7. Battery life: approx. 1000 cycles
8. Dimensions: 385 mm × 63 mm × 70 mm
9. Weight: 0.7 kg
10. Degree of protection: IP 65

